


# RAS

Wit of zwarte vaste inbouwspot met bladveren; met vervangbare CRI95 ledmodule van 640Lm; verkrijgbaar in 2700K of 3000K. Ook in IP54 variant verkrijgbaar; opbouwrand voor trimless effect. Driver apart te bestellen; beschikbaar voor zowel fase- als DALI-dimming.



Referentie	Wattage	Lumen	Kelvin	Kleur	Richtbaar	CRI	Stralingshoek	IP	Dimming	InbouwØ	Veren	Afmeting	Input	Driver	LVD	BK
RASW27	8	640	2700	WIT	/	95	40°	20	TRIAC/DALI	72mm	Bladveren	Ø82 x 63,5mm	200mA	Excl	100.000u	III
RASW30	8	640	3000	WIT	/	95	40°	20	TRIAC/DALI	72mm	Bladveren	Ø82 x 63,5mm	200mA	Excl	100.000u	III
RASZ27	8	640	2700	ZWART	/	95	40°	20	TRIAC/DALI	72mm	Bladveren	Ø82 x 63,5mm	200mA	Excl	100.000u	III
RASZ30	8	640	3000	ZWART	/	95	40°	20	TRIAC/DALI	72mm	Bladveren	Ø82 x 63,5mm	200mA	Excl	100.000u	III
RASIPW27	8	640	2700	WIT	/	95	40°	54	TRIAC/DALI	72mm	Bladveren	Ø82 x 63,5mm	200mA	Excl	100.000u	III
RASIPW30	8	640	3000	WIT	/	95	40°	54	TRIAC/DALI	72mm	Bladveren	Ø82 x 63,5mm	200mA	Excl	100.000u	III
RASIPZ27	8	640	2700	ZWART	/	95	40°	54	TRIAC/DALI	72mm	Bladveren	Ø82 x 63,5mm	200mA	Excl	100.000u	III
RASIPZ30	8	640	3000	ZWART	/	95	40°	54	TRIAC/DALI	72mm	Bladveren	Ø82 x 63,5mm	200mA	Excl	100.000u	III
DRIVERS1	DRIVER TRIAC DIM - 1 SPOT															
DRIVERSM2	DRIVER TRIAC DIM - 2 SPOTS															
DRIVERDALIS1	DRIVER DALI DIM - 1 SPOT															
DRIVERDALISM2	DRIVER DALI DIM - 2 SPOTS															
DRIVERDALILDD	CONSTANT CURRENT DRIVER LDD 48V DALI DIM - 1 SPOT															

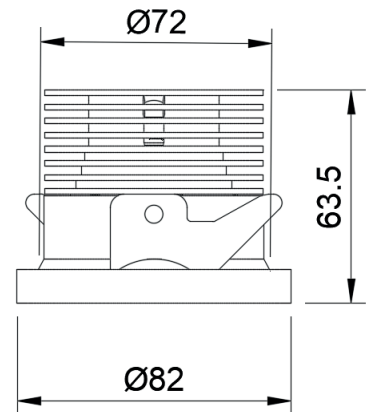