


TECHNISCHE FICHE

inbouwspot

lunatrix®

VES

Wit of zwarte vaste inbouwspot met bladveren; met vervangbare CRI95 ledmodule van 640Lm; verkrijgbaar in 2700K of 3000K. Ook in IP54 variant verkrijgbaar. Driver apart te bestellen; beschikbaar voor zowel fase- als DALI-dimming.

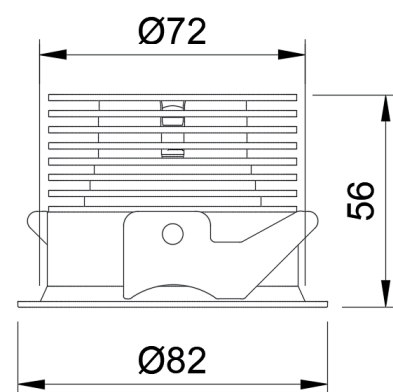

Referentie	Wattage	Lumen	Kelvin	Kleur	Richtbaar	CRI	Stralingshoek	IP	Dimming	InbouwØ	Veren	Afmeting	Input	Driver	LVD	BK
VESW27	8	640	2700	WIT	/	95	40°	20	TRIAC/DALI	72mm	Bladveren	Ø82 x 56mm	200mA	Excl	100.000u	III
VESW30	8	640	3000	WIT	/	95	40°	20	TRIAC/DALI	72mm	Bladveren	Ø82 x 56mm	200mA	Excl	100.000u	III
VESZ27	8	640	2700	ZWART	/	95	40°	20	TRIAC/DALI	72mm	Bladveren	Ø82 x 56mm	200mA	Excl	100.000u	III
VESZ30	8	640	3000	ZWART	/	95	40°	20	TRIAC/DALI	72mm	Bladveren	Ø82 x 56mm	200mA	Excl	100.000u	III
VESIPW27	8	640	2700	WIT	/	95	40°	54	TRIAC/DALI	72mm	Bladveren	Ø82 x 56mm	200mA	Excl	100.000u	III
VESIPW30	8	640	3000	WIT	/	95	40°	54	TRIAC/DALI	72mm	Bladveren	Ø82 x 56mm	200mA	Excl	100.000u	III
VESIPZ27	8	640	2700	ZWART	/	95	40°	54	TRIAC/DALI	72mm	Bladveren	Ø82 x 56mm	200mA	Excl	100.000u	III
VESIPZ30	8	640	3000	ZWART	/	95	40°	54	TRIAC/DALI	72mm	Bladveren	Ø82 x 56mm	200mA	Excl	100.000u	III
DRIVERS1	DRIVER TRIAC DIM - 1 SPOT															
DRIVERSM2	DRIVER TRIAC DIM - 2 SPOTS															
DRIVERDALIS1	DRIVER DALI DIM - 1 SPOT															
DRIVERDALISM2	DRIVER DALI DIM - 2 SPOTS															
DRIVERDALILDD	CONSTANT CURRENT DRIVER LDD 48V DALI DIM - 1 SPOT															

